

# CP-X300



## BUSINESS PROJECTOR

The Hitachi CP-X300 is a 2600 ANSI Lumen desktop video and data projector, perfect for high end business or education use. The CP-X300 includes many advanced security and video enhancement features along with an impressive brightness and low fan noise - all at an affordable price.

- 2600 ANSI Lumens with Optical Zoom
- Full Connectivity
- Quick Start and Instant Off
- Auto Vertical Keystone
- Input Source Naming
- My Button
- 7W Mono Speaker
- Whiteboard Mode and Blackboard Mode
- Anti Theft Features:
  - PIN Lock
  - MyScreen Lock
  - Transition Detector



**HITACHI**  
Inspire the Next

# CP-X300

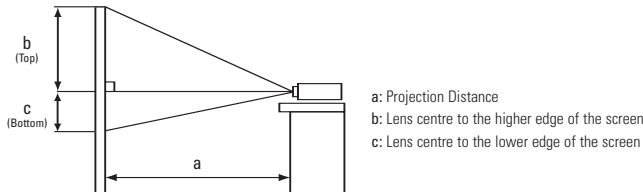
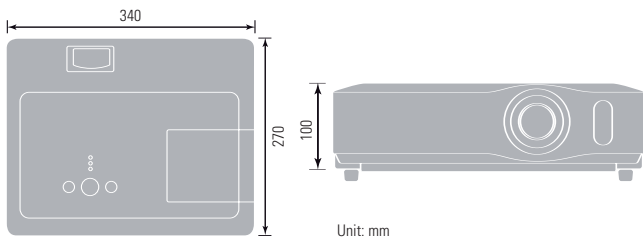


Image Size 4:3				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.2	1.4	55	6
60" (1.5)	1.8	2.2	82	9
100" (2.5)	3.0	3.6	137	15
150" (3.8)	4.6	5.5	206	23
200" (5.1)	6.1	7.3	274	30
300" (7.6)	9.1	11	411	46

## CP-X300 Technical Specifications

### OPTICAL

LCD Panel	0.63" P-Si TFT x 3
Resolution	XGA: 1024 dots x 768 lines
Brightness	Normal Mode: 2600 ANSI Lumens Whisper Mode: 2100 ANSI Lumens
Contrast Ratio	500:1 (typ)
Lens	F1.7-1.9 (f=19.5-23.4mm) Manual Focus, Manual Zoom x 1.2
Lamp	220W UHB
Lamp Life	2000 (normal)/3000 (whisper)
Projection Distance	0.9 - 11.0m
Distance to Width Ratio (:1)	1.5 (WIDE), 1.8 (TELE)
Diagonal Display Size	30 - 300" (60"@1.8m, Wide)
Number of Colour	8 Bit/colour, 16.7M colours
Keystone Correction	9:1 upward shift, fixed

### COMPATIBILITY

Computer Compatibility	IBM Compatible VGA, SVGA, XGA, SXGA/SXGA+, UXGA Capability, MAC 13", MAC 16" (Pixelworks chip)
Video Compatibility	NTSC/PAL(-BGDHI)/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p (720p@50/60Hz), 1125i(1080i@50/60Hz)
Plug & Play	DDC2B
Frequency Range	FV 56-120Hz, FH 31.5-106kHz

### FEATURES

Speakers	7W Mono
Other	Freeze, Magnifying, Blank, Auto adjustment, Search, Page UP&DOWN (for USB mouse function), Equalising Gamma Correction, 2-3 pull down, Progressive Scan, Noise Reduction, Auto V keystone +/- 30 degrees (@XGA 60Hz), MyScreen, My Memory, My Button, blackboard/whiteboard mode, input source naming (english), resolution setting. Easy Lamp replace from Top, Air Filter on side, Serial Number label on side, Quick ON (4 sec), Direct ON, Direct Off, Security Bar, PIN Lock, MyScreen PIN lock, Keypad Lock, Kensington slot, Transition Detector
OSD Languages	MENU : 17 Language

### CONNECTIONS

Computer Input	15-pin Mini D-sub x 2
Computer Output	15-pin Mini D-sub x 1
Video Input	RCA Jack x 1 S-Video Jack x 1 RCA Jack x 3 for Component
Audio Input	Stereo Mini Jack x 2 RCA (L/R) x 1 pair (Selectable on OSD)
Audio Output	Stereo Mini Jack x 1
Control and Mouse	9-pin D-sub x 1 for RS232 control USB type B x 1 for mouse control

### POWER

Power Supply	AC90-132 / 198-264 V Auto Switching
Power Consumption	320W

### PHYSICAL

Dimensions (W x H x D)	340 x 100 x 270mm (excluding feet and extrusions)
Weight	3.5kg (Target)/7.8lbs
Noise Level	35dB/29dB
Air Filter	MU04951

### MISCELLANEOUS

Lamp indicator light, Power light, Ceiling Mount image, Rear Projection Image

### CERTIFICATION

UL60950/C-UL, FCC Part 15 Class B, 'CE, AS/NZS CISPR22 Class B

### ACCESSORIES SUPPLIED

Remote Control with batteries, Computer Cable, Power Cord, User Manual (detail & concise), Softcase, Lens Cap (& strap), Security Label, AV cable

### OPTIONAL ACCESSORIES

Replacement Lamp	DT00841
------------------	---------

Image Size 16:9				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.3	1.6	51	-2
60" (1.5)	2	2.4	77	-2
100" (2.5)	3.3	4	129	-4
150" (3.8)	4.9	6	193	-6
200" (5.1)	6.6	8	257	-8
300" (7.6)	9.9	12	386	-12

## INFORMATION & IMAGE MANAGEMENT SYSTEMS, S.A.

Valencia, 279, 7ª planta  
08009 Barcelona (España)  
<http://www.ims.es>



Tel. (34) 93 272 33 00  
Fax (34) 93 487 39 00  
e-mail:info@ims.es